


ARTISTRY - YS3 Series Light and Thin Fixed Outdoor LED

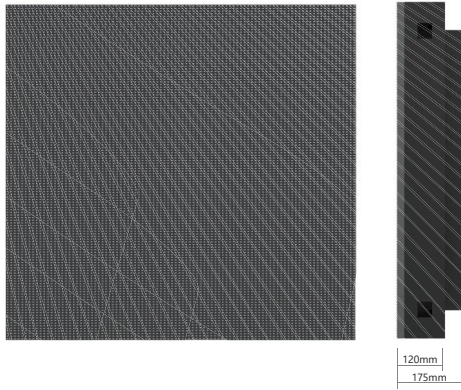

ARTISTRY - YS3 Series Light and Thin Fixed Outdoor LED is the perfect extension to the hugely popular outdoor LED product range - the redesigned and modified cabinet structure dimensions increase to 960mm x 960mm and are consistent across the wide selection of pixel pitches. Meeting IP66 front and rear standards the YS3 LED display series is resistant to dust, water and weatherproof. YS3 Series is highly competent for demanding environments.

Application

- Retail Store
- Shopping Mall
- Airport
- Theater
- Campus


- Thin and Light, Aluminum Quality



- Front/Rear Access



- Module Size:
480mm x 160mm

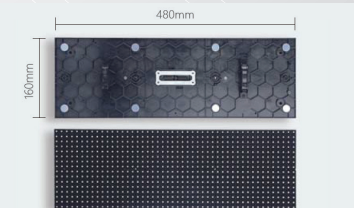


- Smart Module



ARTISTRY - YS3 Series Light and Thin Fixed Outdoor LED

Model	P5	P6.67	P8	P10
Optical Parameter				
Pixel Pitch (mm)	5mm	6.67mm	8mm	10mm
Pixel Configuration	3 in 1 SMD	3 in 1 SMD	3 in 1 SMD	3 in 1 SMD
Pixel Density (Pixel/m ²)	40000Pixel/m ²	22500Pixel/m ²	15625Pixel/m ²	10000Pixel/m ²
Viewing Angle (50% Brightness)(H/V)	160° / 140°	160° / 140°	160° / 140°	160° / 140°
Brightness (cd/m ²)	6500~7000cd/m ²	6500~7000cd/m ²	6500~7000cd/m ²	6500~7000cd/m ²
Contrast Ratio	≥5000:1	≥5000:1	≥5000:1	≥5000:1
Color Temperature (k)	3500~9300k	3500~9300k	3500~9300k	3500~9300k
Processing Depth (bit)	16bit	16bit	16bit	16bit
Refresh Rate (Hz)	≥1920Hz	≥1920Hz	≥1920Hz	≥1920Hz
Optimized Viewing Distance (m)	≥5m	≥6m	≥8m	≥10m
Structure Parameter				
Module Size in Pixel (W × H)	96 × 32pixel	72 × 24pixel	60 × 20pixel	48 × 16pixel
Module Size in mm (W × H)	480 × 160mm	480 × 160mm	480 × 160mm	480 × 160mm
Cabinet Size in Pixel (W × H)	192 × 192 / 192 × 224pixel	144 × 144 / 144 × 168pixel	120 × 120 / 120 × 140pixel	96 × 96 / 96 × 112pixel
Cabinet Size in mm (W × H × D)	960 × 960 × 175 / 960 × 1120 × 175mm	960 × 960 × 175 / 960 × 1120 × 175mm	960 × 960 × 175 / 960 × 1120 × 175mm	960 × 960 × 175 / 960 × 1120 × 175mm
Cabinet Weight (kg/m ²)	33kg/m ²	33kg/m ²	33kg/m ²	33kg/m ²
IP Rating	Front: IP66 / Rear: IP66	Front: IP66 / Rear: IP66	Front: IP66 / Rear: IP66	Front: IP66 / Rear: IP66
Operation Parameter				
Maintenance	Front / Rear Access			
Operating Temperature (°C)	-20°C~50°C			
Operating Humidity (RH%)	10~90RH%			
Life Time (50% Brightness)(Hours)	≥100000Hours			
Max. Power Consumption (W/m ²)	650W/m ²	650W/m ²	650W/m ²	650W/m ²
Avg. Power Consumption (W/m ²)	228W/m ²	228W/m ²	228W/m ²	228W/m ²
System Parameter				
Video Signal Input	HDMI / DVI-D			

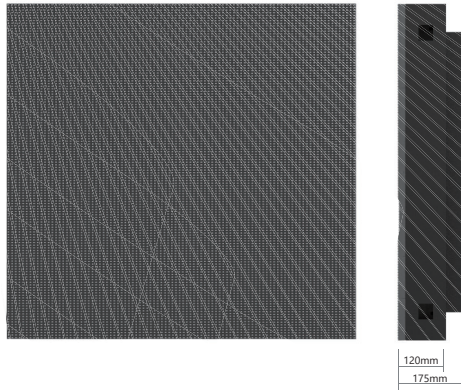

ARTISTRY - YS3系列超轻薄户外LED是非常受欢迎的户外LED产品系列 - 经过重新设计和改装机柜结构尺寸增加至960mm x 960mm · LED的性能更稳定，并且有多种像素间距可供选择。ARTISTRY YS3 LED系列符合IP66前后维护标准，可防尘、防水、防风雨，非常适合要求苛刻的环境。

应用

- 零售店
- 购物中心
- 飞机场
- 剧院
- 校园


· 轻薄，铝质



· 前/后维护



· 模块尺寸：
480毫米x 160毫米

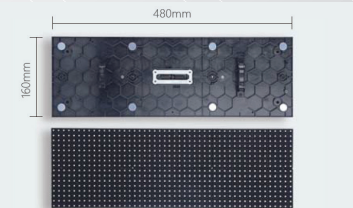

· 智能模块



型号	P5	P6.67	P8	P10
光学参数				
点间距 (mm)	5mm	6.67mm	8mm	10mm
发光管类型	3 in 1 SMD	3 in 1 SMD	3 in 1 SMD	3 in 1 SMD
点密度(点/m ²)	40000点/m ²	22500点/m ²	15625点/m ²	10000点/m ²
视角(亮度为50%时)(水平/垂直)	160° / 140°	160° / 140°	160° / 140°	160° / 140°
亮度 (cd/m ²)	6500~7000cd/m ²	6500~7000cd/m ²	6500~7000cd/m ²	6500~7000cd/m ²
对比度	≥5000:1	≥5000:1	≥5000:1	≥5000:1
色温 (k)	3500~9300k	3500~9300k	3500~9300k	3500~9300k
处理深度 (bit)	16bit	16bit	16bit	16bit
刷新率 (Hz)	≥1920Hz	≥1920Hz	≥1920Hz	≥1920Hz
最佳观看距离 (m)	≥5m	≥6m	≥8m	≥10m
结构参数				
模块尺寸 (W × H) (点)	96 × 32点	72 × 24点	60 × 20点	48 × 16点
模块尺寸 (W × H) (mm)	480 × 160mm	480 × 160mm	480 × 160mm	480 × 160mm
模组尺寸 (W × H) (点)	192 × 192 / 192 × 224点	144 × 144 / 144 × 168点	120 × 120 / 120 × 140点	96 × 96 / 96 × 112点
模组尺寸 (W × H × D) (mm)	960 × 960 × 175 / 960 × 1120 × 175mm	960 × 960 × 175 / 960 × 1120 × 175mm	960 × 960 × 175 / 960 × 1120 × 175mm	960 × 960 × 175 / 960 × 1120 × 175mm
模组重量 (kg/m ²)	33kg/m ²	33kg/m ²	33kg/m ²	33kg/m ²
防护等级	前: IP66 / 后: IP66	前: IP66 / 后: IP66	前: IP66 / 后: IP66	前: IP66 / 后: IP66
操作参数				
维护方式	前/后维护			
工作温度 (°C)	-20°C~50°C			
工作湿度 (RH%)	10~90RH%			
寿命 (亮度为50%时) (小时)	≥100000小时			
最大功耗 (W/m ²)	650W/m ²	650W/m ²	650W/m ²	650W/m ²
平均功耗 (W/m ²)	228W/m ²	228W/m ²	228W/m ²	228W/m ²
系统参数				
视频信号输入	HDMI / DVI-D			