

ARTISTRY – ART55VD38 Super Narrow Seam DID LCD Unit is the ideal display for a seamless video wall, at very affordable price. This product series is designed to have a super narrow seam, suitable for the construction of video wall of any size. It is definitely an invaluable assets in applications like command centers, control rooms, conference rooms, etc...




**Application**

- Command Centre
- Control Room
- Conference Room
- Retail Store
- Restaurant
- Museum

· Super Narrow Combined Seam of 3.8mm



· Intelligent Split Screen

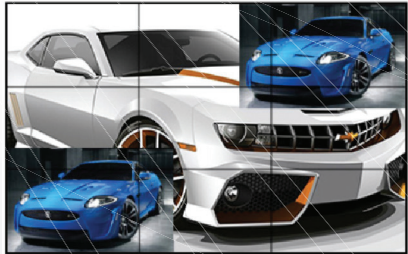

· Golden Ratio: 16:9




· Ultra Wide Viewing Angle



178° Viewing Angle

Model	ART55VD38
Parameter	
Screen Size (mm)	1213.5 × 684.3 × 113mm
Image Aspect Ratio	16 : 9
Both Sides Splicing Gap	3.8mm (left top 2.3mm, right down 1.5mm)
Optimum Resolution (Pixel)	1920 × 1080pixel
Compatible Resolution (Pixel)	1920 × 1080; 1600 × 1200; 1366 × 768; 1280 × 1024; 1280 × 768; 1024 × 768pixel
Dot Pitch (mm)	0.53mm
Response Time (ms)	8ms
Display Color	10bit, 16.7m
Brightness (cd/m <sup>2</sup> )	500cd/m <sup>2</sup>
Contrast Ratio	4000 : 1
Color Temperature (k)	10000k
Viewing Angle (H/V)	178° / 178°
Backlight	WLED
Power	AC100V ~ 240V, 50/60Hz, Universal, ±10%
Power Dissipation (W)	250W (Normal Working Status)
Life Time (50% Brightness)(Hours)	60000Hours
Machine Weight (kg)	29kg
Signal Interface	AV, VGA, DVI, HDMI, SDI, YPbPr, USB
Temperature (C)	Working Temperature: 0C~50C, Storage Temperature: -20C~70C
Standard Fitting	Power Cable
Optional Fitting	Cabinet, Wall-mounting, Floor Stand

\*Subject to change without prior notice

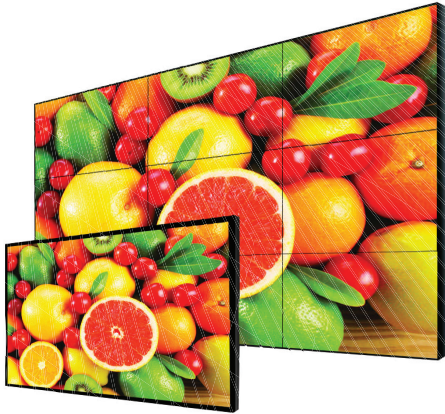

ARTISTRY - ART55VD38超窄边DID LCD单元是并接无缝视频墙的理想显示器，价格非常实惠。此产品系列设计具有超窄缝，适用于任何尺寸的视频墙施工。它绝对是指挥中心、控制室、会议室等应用中的理想选择。



### 应用

- 指挥中心
- 控制室
- 会议室
- 零售商店
- 餐厅
- 博物馆

· 超窄缝组合仅宽3.8mm




· 智能分屏



· 黄金比例：16：9



· 超宽视角

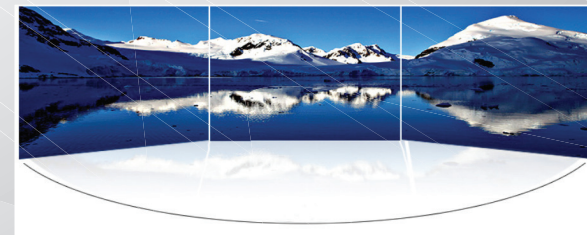

178° 可视角度



型号	ART55VD38
参数	
屏幕尺寸 (mm)	1213.5 × 684.3 × 113mm
图象长宽比	16 : 9
双边拼缝	3.8mm (左上 2.3mm, 右下 1.5mm)
最佳分辨率 (点)	1920 × 1080点
兼容分辨率 (点)	1920 × 1080; 1600 × 1200; 1366 × 768; 1280 × 1024; 1280 × 768; 1024 × 768点
点距 (mm)	0.53mm
响应时间 (ms)	8ms
显示颜色	10bit, 16.7m
亮度 (cd/m <sup>2</sup> )	500cd/m <sup>2</sup>
对比度	4000 : 1
色温 (k)	10000k
可视角度 (H/V)	178° / 178°
背光源	WLED
电源	AC100V ~ 240V, 50/60Hz, 普遍, ±10%
功耗 (W)	250W(正常工作状态)
使用寿命 (50%亮度) (小时)	60000小时
整机重量 (kg)	29kg
信号接口	AV, VGA, DVI, HDMI, SDI, YPbPr, USB
温度 (°C)	工作温度: 0°C~50°C, 储存温度: -20°C~70°C
标准配件	电源线
可选配件	机柜式、壁挂式、落地式

\*如有更改，恕不另行通知