


ARTISTRY - MU Series Ultra Slim Indoor LED is a dynamic, high-definition LED display allowing boundless opportunities to create an unforgettable space. Each frame is manufactured specifically for your installation. This series includes 0.9mm, 1.2mm, 1.5mm, 1.8mm and 2.5mm which provides sharp image output, fluent video displaying and high refresh rate. The design for front access saves time and labor in display maintenance. Also, the premium materials used in LED display enhance the reliability of the display which guarantees you the long life-span and steady performance.

### Application

- University
- Meeting Room
- Traffic Control Room
- Monitor Security Room
- Bank Centre


· 2K, 4K, 8K Resolution

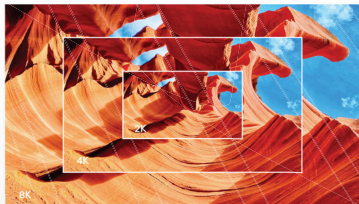

· Synchronization Technology



· Seamless Connection

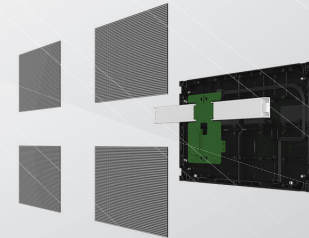

· Super Thin and Light



# ARTISTRY - MU Series Ultra Slim Indoor LED

Model	P0.9	P1.2	P1.5	P1.8	P2.5
<b>Optical Parameter</b>					
Pixel Pitch (mm)	0.9375mm	1.25mm	1.56mm	1.875mm	2.5mm
Pixel Configuration	SMD	SMD	SMD	SMD	SMD
Pixel Density (Pixel/m <sup>2</sup> )	230400Pixel/m <sup>2</sup>	129600Pixel/m <sup>2</sup>	82944Pixel/m <sup>2</sup>	57600Pixel/m <sup>2</sup>	32400Pixel/m <sup>2</sup>
Viewing Angle (50% Brightness)(H/V)	140° / 120°	140° / 120°	140° / 120°	140° / 120°	140° / 120°
Brightness (cd/m <sup>2</sup> )	500cd/m <sup>2</sup>	600cd/m <sup>2</sup>	600cd/m <sup>2</sup>	600cd/m <sup>2</sup>	800cd/m <sup>2</sup>
Contrast Ratio	≥3000:1	≥3000:1	≥3000:1	≥3000:1	≥3000:1
Color Temperature (k)	5500-8000k	5500-8000k	5500-8000k	5500-8000k	3500-9300k
Processing Depth (bit)	16bit	16bit	16bit	16bit	16bit
Refresh Rate (Hz)	3840Hz	3840Hz	3840Hz	3840Hz	3840Hz
Optimized Viewing Distance (m)	≥0.9m	≥1.2m	≥1.5m	≥1.8m	≥2.5m
<b>Structure Parameter</b>					
Module Size in Pixel (W × H)	320 × 180pixel	240 × 135pixel	192 × 108pixel	160 × 90pixel	120 × 135pixel
Module Size in mm (W × H × D)	300 × 168.75 × 4mm	300 × 168.75 × 4mm	300 × 168.75 × 4mm	300 × 168.75 × 4mm	300 × 168.75 × 4mm
Cabinet Size in Pixel (W × H)	640 × 360pixel	480 × 270pixel	384 × 216pixel	320 × 180pixel	240 × 135pixel
Cabinet Size in mm (W × H × D)	600 × 337.5 × 25mm	600 × 337.5 × 25mm	600 × 337.5 × 25mm	600 × 337.5 × 25mm	600 × 337.5 × 25mm
Weight (kg/m <sup>2</sup> )	22.2kg/m <sup>2</sup>	22.2kg/m <sup>2</sup>	22.2kg/m <sup>2</sup>	22.2kg/m <sup>2</sup>	22.2kg/m <sup>2</sup>
<b>Operation Parameter</b>					
Maintenance	Front Access				
Operating Temperature (C)	-10C~40C				
Operating Humidity (RH%)	10~90RH%				
Life Time (50% Brightness)(Hours)	≥100000Hours				
Max. Power Consumption (W/m <sup>2</sup> )	400W/m <sup>2</sup>	460W/m <sup>2</sup>	350W/m <sup>2</sup>	380W/m <sup>2</sup>	420W/m <sup>2</sup>
Avg. Power Consumption (W/m <sup>2</sup> )	140W/m <sup>2</sup>	175W/m <sup>2</sup>	110W/m <sup>2</sup>	140W/m <sup>2</sup>	140W/m <sup>2</sup>
<b>System Parameter</b>					
Video Signal Input	HDMI / DVI-D				

\*Subject to change without prior notice